


SH 340 FS VDE

WEZAG

Schneiden

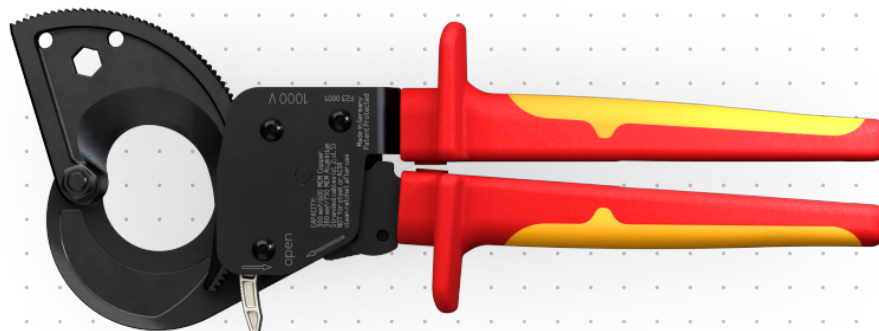

This tool is made for these applications

Cable up to max. Ø 34 mm from conductor class 1, 2 & 5 in accordance with DIN EN 60228 | VDE 0295 | IEC 60228

That is particularly

Insulated handles in accordance with IEC 60900 for live working up to AC 1000 V and DC 1500 V.

Cutting of three different conductor classes with one tool.

Cuts cables in a clean and smooth way. You are always perfectly prepared for the next processing step.

Handles even heavy jobs with ease, thanks to optimum transmission ratios.

The low weight and compact size make it easy for you to work.

These functions make cutting more convenient

The cable cutter can be easily operated with just one hand.

Tool lies comfortably in the hand thanks to soft handles with anti-slip protection.

Can be released in any cutting position in the event of incorrect operation.

Further advantages offered by our Made in Germany standard

Tool is extremely robust, minimal wear.

Blades can be easily replaced if necessary.

Manufactured from special steel, specially hardened and tempered parts - quality that lasts.

Technical Data

Cutting range	CU cable Diameter 34 mm 1 1/4" Cross-section max. 300 mm ² AL cable Diameter 34 mm 1 1/4" Cross-section max. 380 mm ²
Conductor classes	Class 1 solid conductors Class 2 stranded conductors Class 5 fine-stranded conductors DIN EN 60228 VDE 0295 IEC 60228
Dimensions (length x width)	approx. 260 mm x 100 mm
Weight	approx. 580 g